


STANDARD DEPARTURE CHART - INSTRUMENT (SID) - ICAO

DIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEET

DOHA RADAR 121.10
DOHA APP 119.725 / 120.60
TWR 118.90

DOHA/Doha Intl. (OTBD)
RNP RWY 33
SALWA 1N

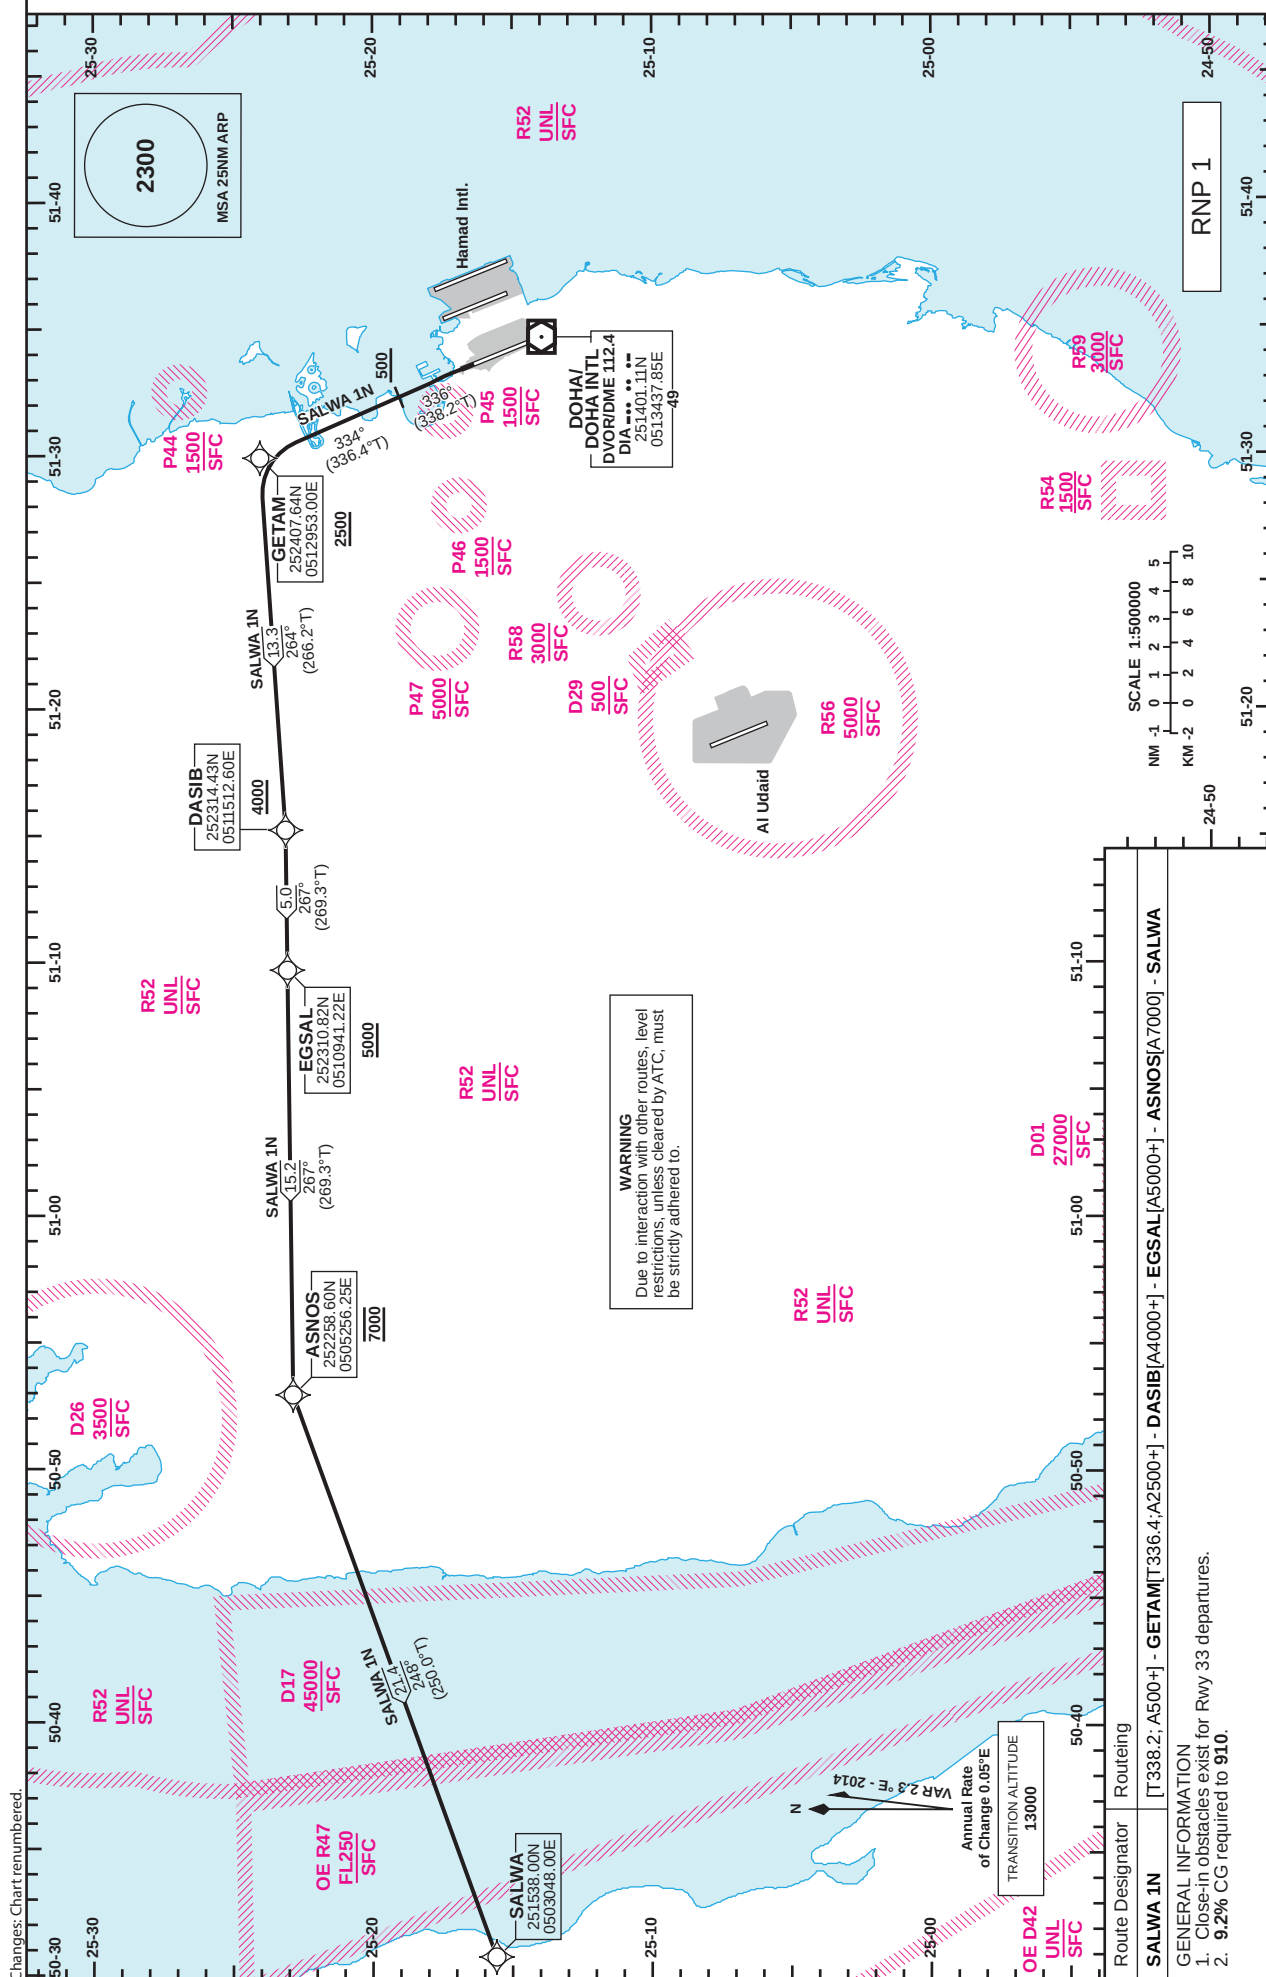

STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO

DOHA/Doha Intl.(OTBD)
RNP RWY 33
SALWA 1N

TABULAR DESCRIPTION

RNP SID SALWA 1N											
Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/TCH(ft)	Navigation Specification
1	CA	-	-	336 (338.2)	2.3	-	-	+500	-	-	RNP 1
2	CF	GETAM	-	334 (336.4)	2.3	-	-	+2500	-	-	RNP 1
3	TF	DASIB	-	264 (266.2)	2.3	13.3	-	+4000	-	-	RNP 1
4	TF	EGSAL	-	267 (269.3)	2.3	5.0	-	+5000	-	-	RNP 1
5	TF	ASNOS	-	267 (269.3)	2.3	15.2	-	@7000	-	-	RNP 1
6	TF	SALWA	-	248 (250.0)	2.3	21.4	-	-	-	-	RNP 1

WAYPOINT LIST

RNP SID SALWA 1N	
Waypoint Identifier	Coordinates
GETAM	252407.64N 0512953.00E
DASIB	252314.43N 0511512.60E
EGSAL	252310.82N 0510941.22E
ASNOS	252258.60N 0505256.25E
SALWA	251538.00N 0503048.00E