


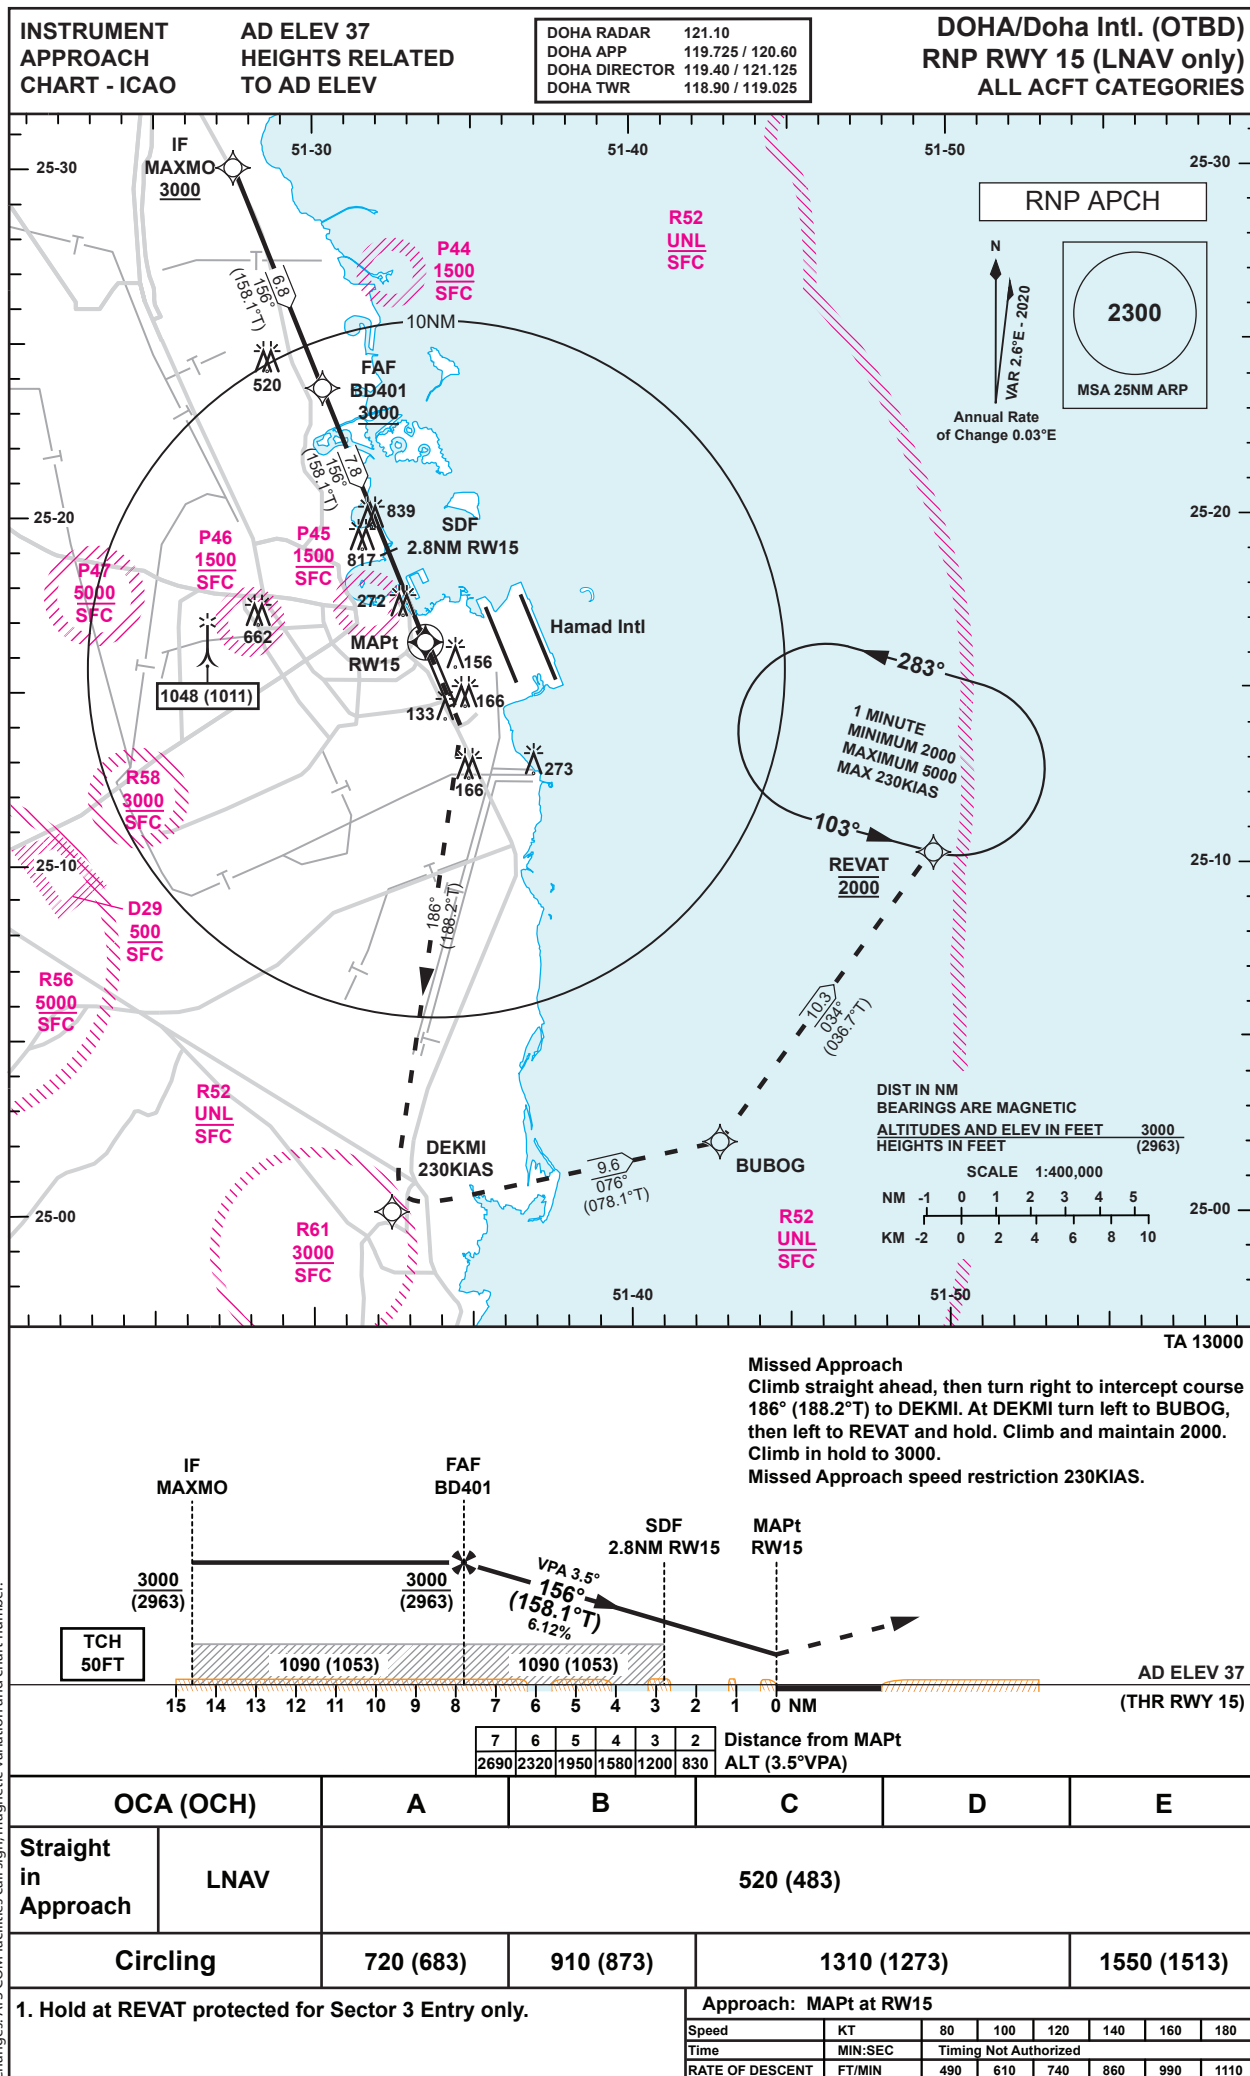

Changes: AIS COM facilities call sign, magnetic variation and chart number.

INSTRUMENT
APPROACH
CHART-ICAO

AD ELEV 37
HEIGHTS RELATED TO AD ELEV

DOHA/Doha Intl.(OTBD)
RNP RWY 15 (LNAV only)
ALL ACFT CATEGORIES

TABULAR DESCRIPTION

RNP RWY 15 (LNAV Only)											
Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/ TCH(ft)	Navigation Specification
1	IF	MAXMO	-	-	-2.6	-	-	+3000	-	-	RNP APCH
2	TF	BD401	-	156 (158.1)	-2.6	6.8	-	+3000	-	-	RNP APCH
3	TF	RW15	Y	156 (158.1)	-2.6	7.8	-	-	-	-3.5/50	RNP APCH
4	CF	DEKMI	-	186 (188.2)	-2.6	-	L	-	-230	-	RNP APCH
5	TF	BUBOG	-	076 (078.1)	-2.6	9.6	-	-	-230	-	RNP APCH
6	TF	REVAT	-	034 (036.7)	-2.6	10.3	-	@2000	-230	-	RNP APCH
7	HM	REVAT	Y	103 (105.2)	-2.6	4.3	L	@3000	-230	-	RNP APCH

WAYPOINT LIST

RNP RWY 15 (LNAV Only)	
Waypoint Identifier	Coordinates
MAXMO	253003.10N 0512732.91E
BD401	252344.28N 0513020.49E
RW15	251626.13N 0513333.92E
DEKMI	250006.66N 0513226.55E
BUBOG	250204.78N 0514245.93E
REVAT	251020.75N 0514932.10E