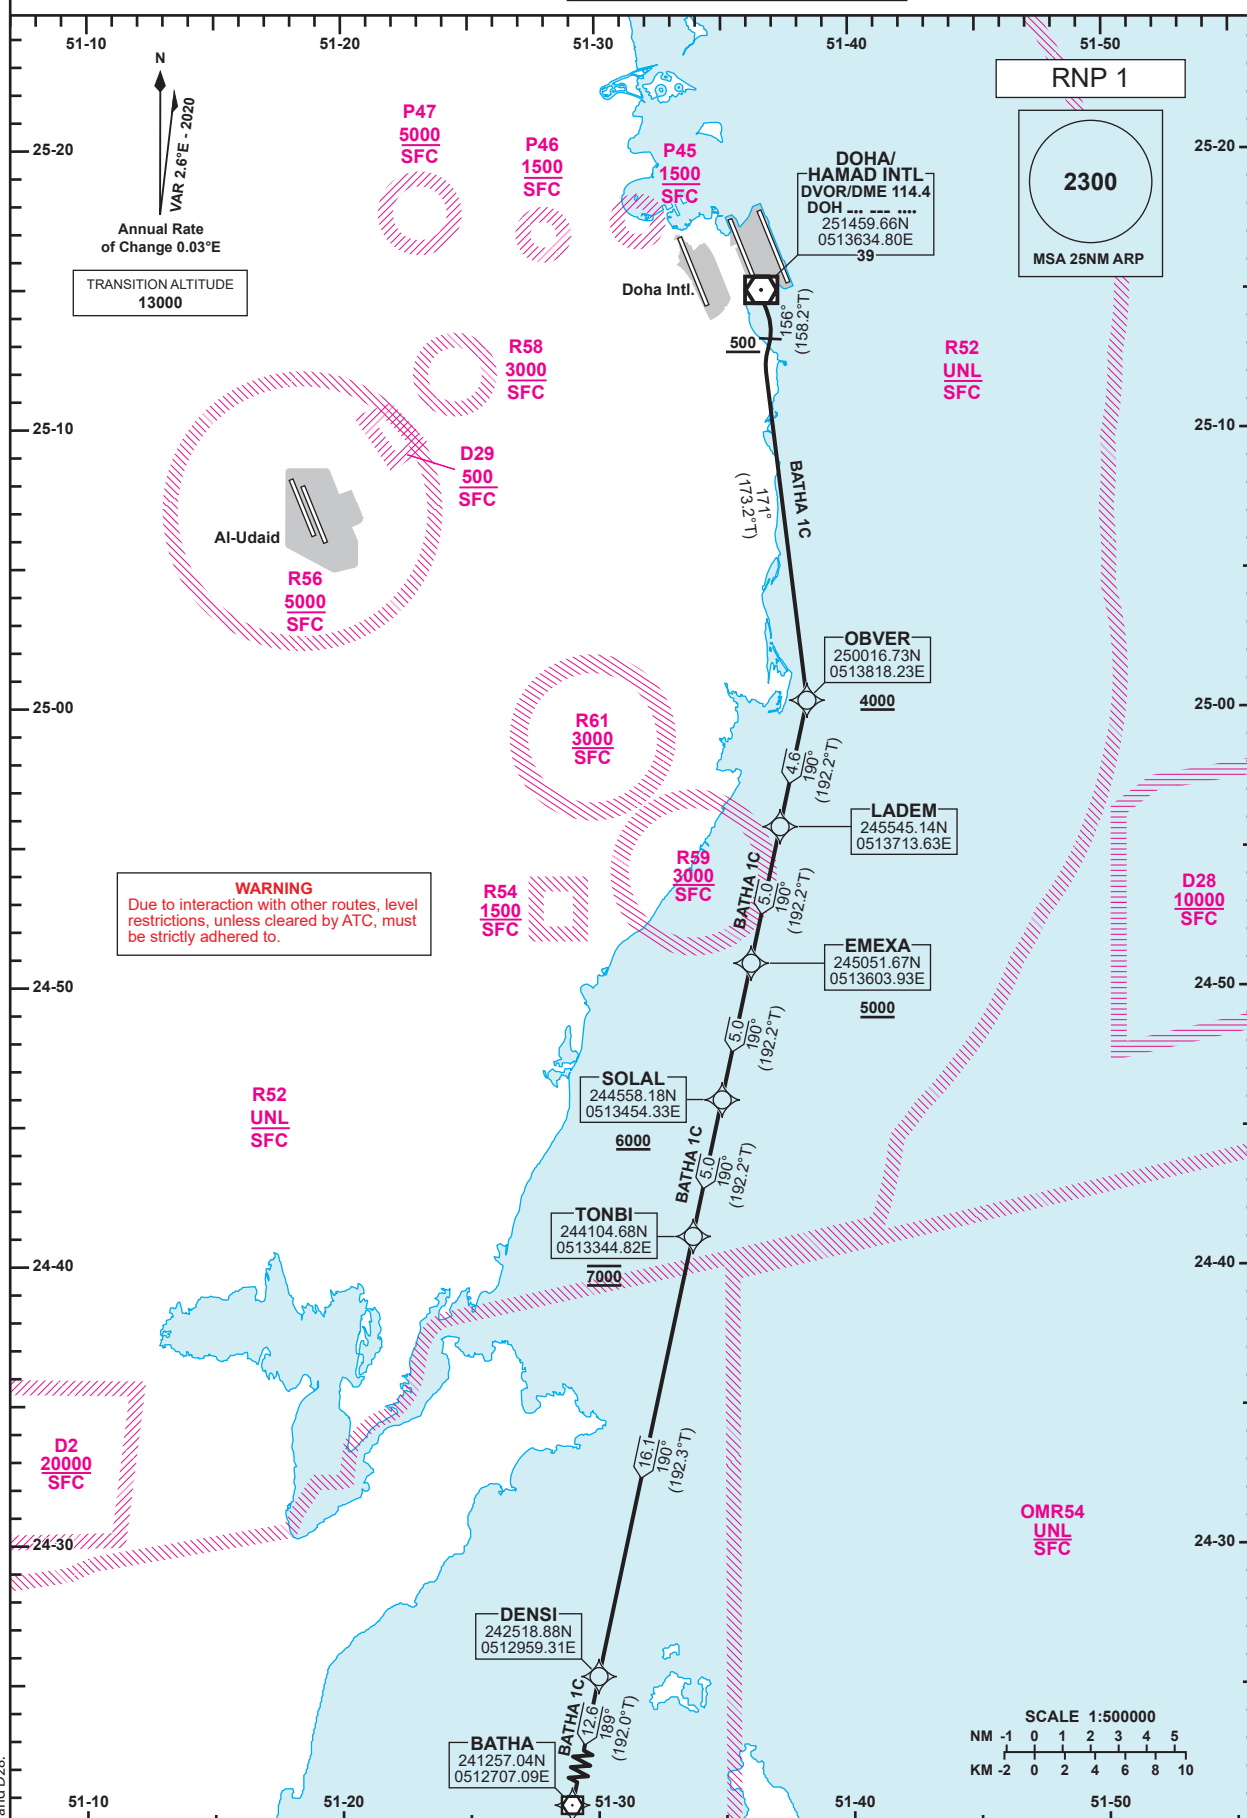


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEETDOHA RADAR 121.10
DOHA APP 119.725 / 120.60
HAMAD TWR (EAST) 118.525 / 118.225
HAMAD TWR (WEST) 118.025 / 118.225DOHA/Hamad Intl. (OTHH)
RNP RWY 16R
BATHA 1C

Changes: Upper limit D2 and D28.

Route Designator

Routing

BATHA 1C [T158.2;A500+] - OBVER[T173.2;A4000+] - LADEM - EMEXA[A5000+] - SOLAL[A6000+] - TONBI[A7000] - DENSI - BATHA

GENERAL INFORMATION

1. Close-in obstacles exist for Rwy 16R departures.
2. 3.5% CG required to 600.

STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO

DOHA/Hamad Intl.(OTHH)
RNP RWY 16R
BATHA 1C

TABULAR DESCRIPTION

RNP SID BATHA 1C											
Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/ TCH(ft)	Navigation Specification
1	CA		-	156 (158.2)	-2.6	-		+500			RNP 1
2	CF	OBVER	-	171 (173.2)	-2.6	-		+4000			RNP 1
3	TF	LADEM	-	190 (192.2)	-2.6	4.6		-			RNP 1
4	TF	EMEXA	-	190 (192.2)	-2.6	5.0		+5000			RNP 1
5	TF	SOLAL	-	190 (192.2)	-2.6	5.0		+6000			RNP 1
6	TF	TONBI	-	190 (192.2)	-2.6	5.0		@7000			RNP 1
7	TF	DENSI	-	190 (192.3)	-2.6	16.1		-			RNP 1
8	TF	BATHA	-	189 (192.0)	-2.6	12.6		-			RNP 1

WAYPOINT LIST

RNP SID BATHA 1C	
Waypoint Identifier	Coordinates
OBVER	250016.73N 0513818.23E
LADEM	245545.14N 0513713.63E
EMEXA	245051.67N 0513603.93E
SOLAL	244558.18N 0513454.33E
TONBI	244104.68N 0513344.82E
DENSI	242518.88N 0512959.31E
BATHA	241257.04N 0512707.09E