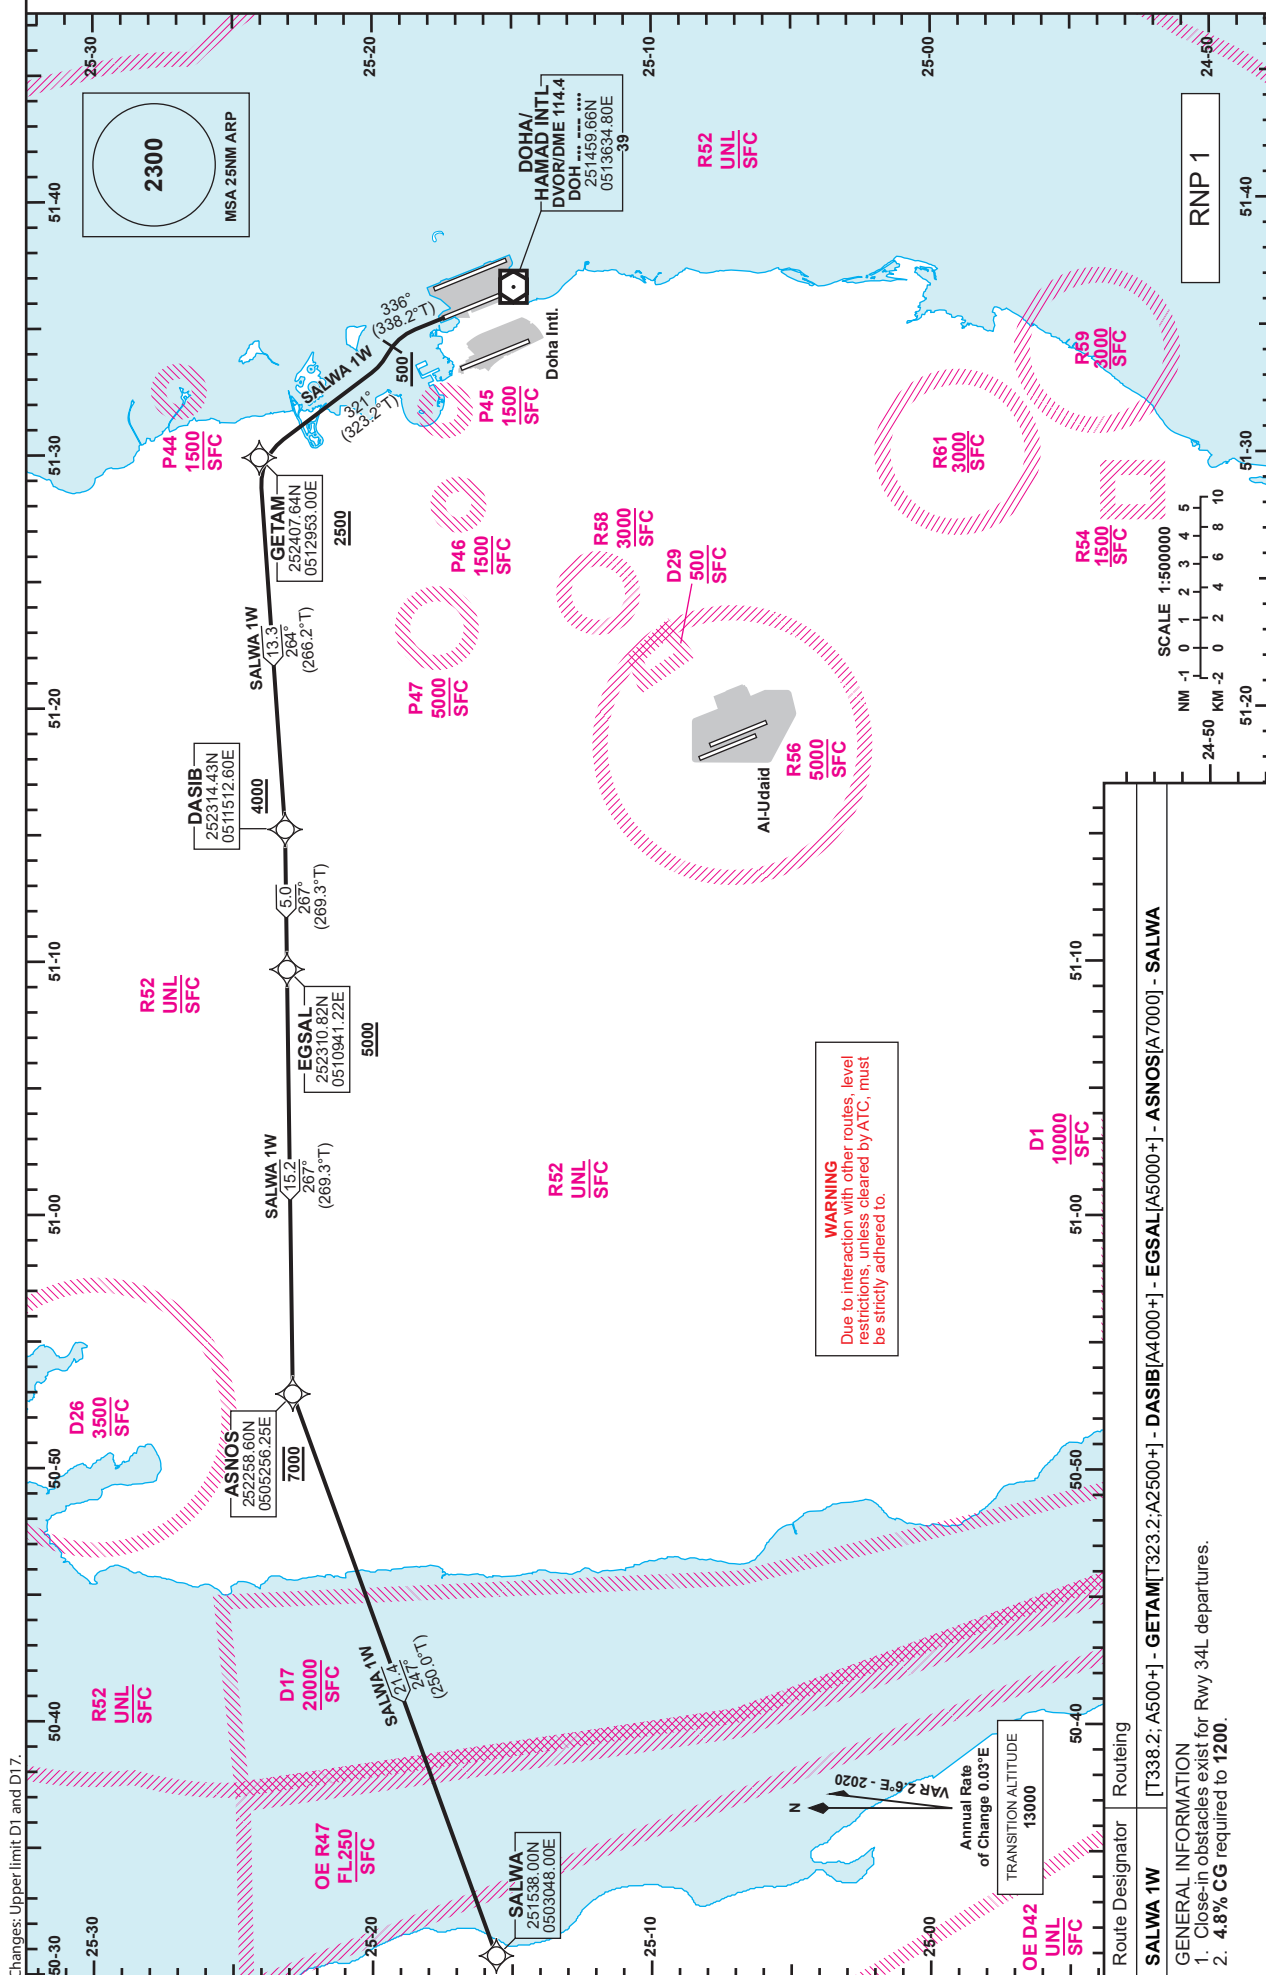


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEET

DOHA RADAR	121.10
DOHA APP	119.725 / 120.60
HAMAD TWR (EAST)	118.525 / 118.225
HAMAD TWR (WEST)	118.025 / 118.225

DOHA/Hamad Intl. (OTHH)
RNP RWY 34L
SALWA 1W

STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO

DOHA/Hamad Intl.(OTHH)
RNP RWY 34L
SALWA 1W

TABULAR DESCRIPTION

RNP SID SALWA 1W

Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/TCH(ft)	Navigation Specification
1	CA	-	-	336 (338.2)	-2.6	-		+500			RNP 1
2	CF	GETAM	-	321 (323.2)	-2.6	-		+2500			RNP 1
3	TF	DASIB	-	264 (266.2)	-2.6	13.3		+4000			RNP 1
4	TF	EGSAL	-	267 (269.3)	-2.6	5.0		+5000			RNP 1
5	TF	ASNOS	-	267 (269.3)	-2.6	15.2		@7000			RNP 1
6	TF	SALWA	-	247 (250.0)	-2.6	21.4		-			RNP 1

WAYPOINT LIST

RNP SID SALWA 1W

Waypoint Identifier	Coordinates
GETAM	252407.64N 0512953.00E
DASIB	252314.43N 0511512.60E
EGSAL	252310.82N 0510941.22E
ASNOS	252258.60N 0505256.25E
SALWA	251538.00N 0503048.00E