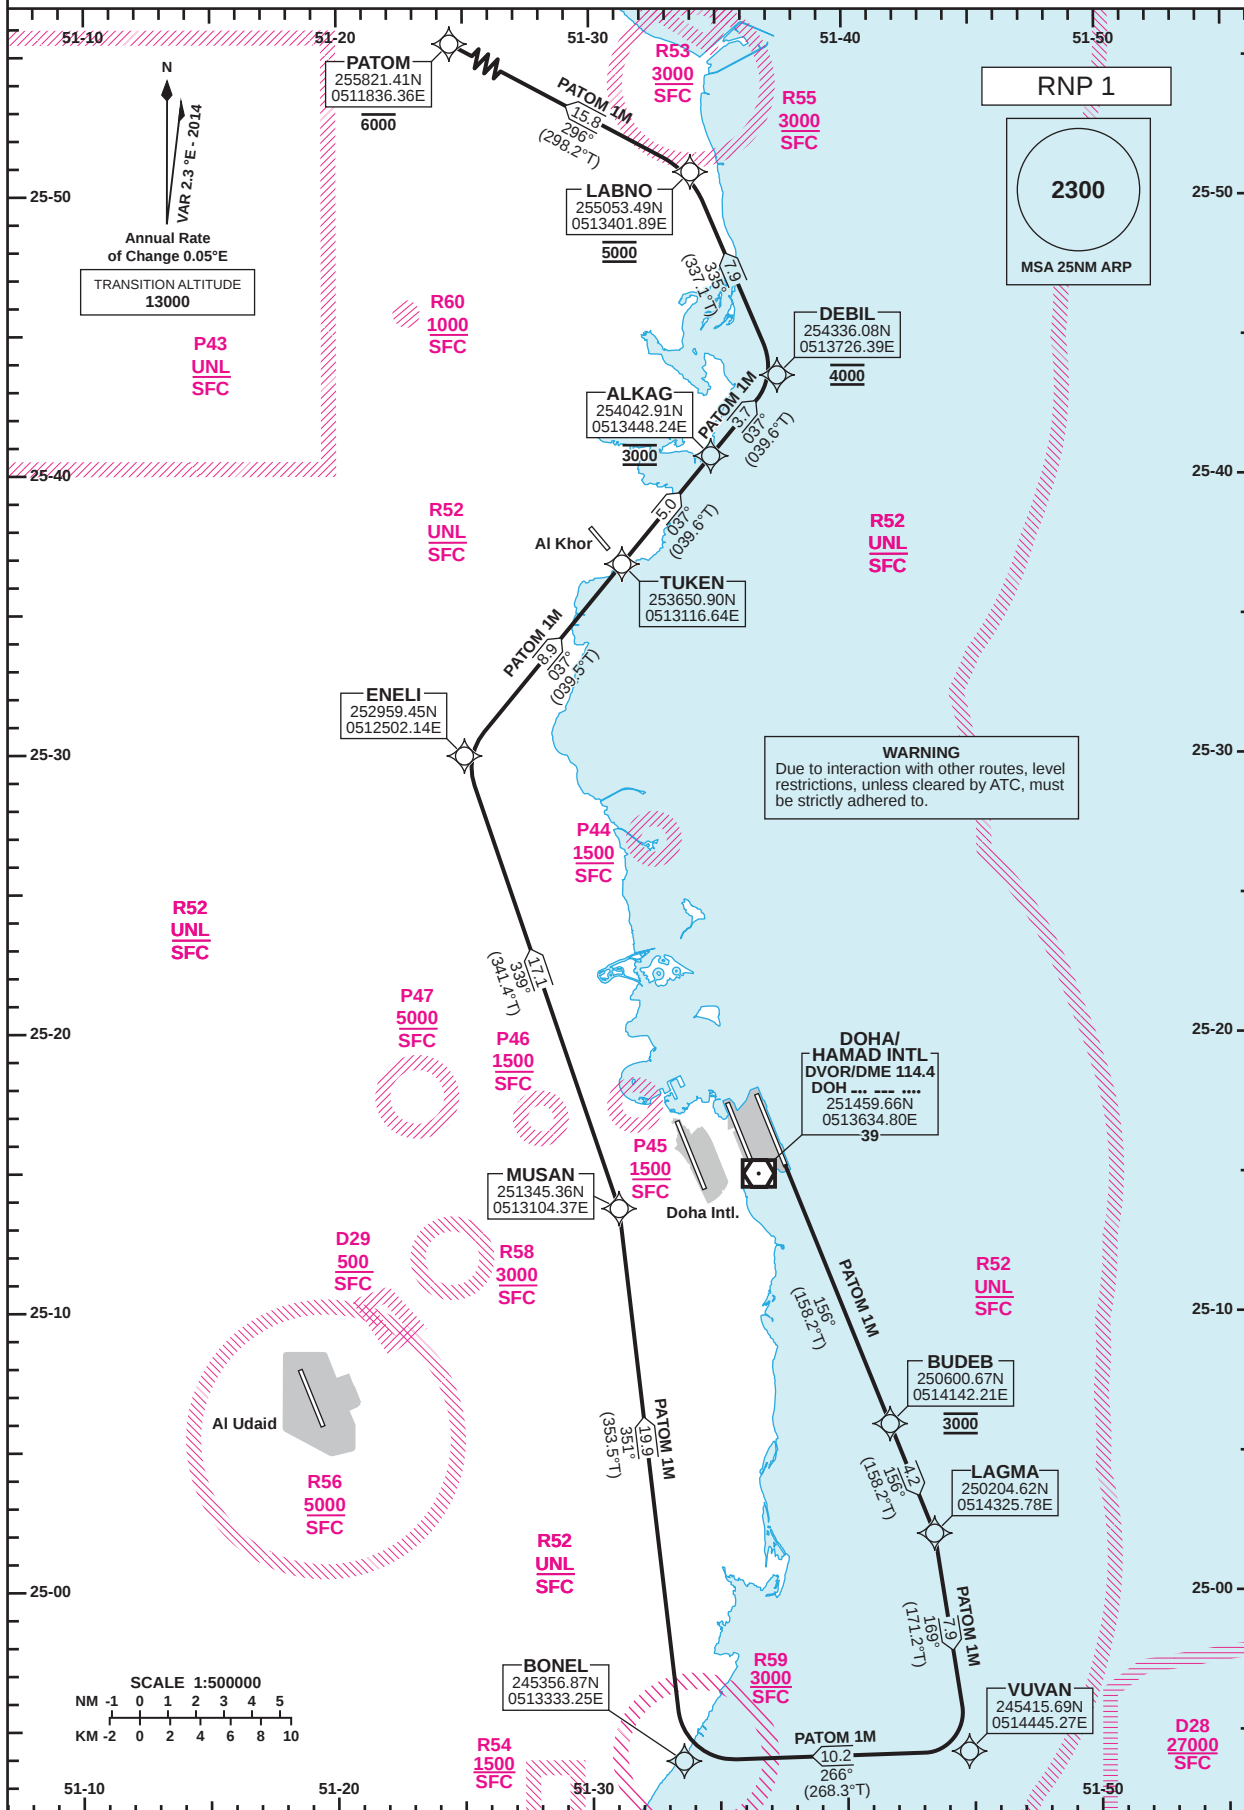


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEET

DOHA RADAR	121.10
DOHA APP	119.725 / 120.60
TWR (EAST)	118.525 / 118.225
TWR (WEST)	118.025 / 118.225

DOHA/Hamad Intl. (OTHH)
RNP RWY 16L
PATOM 1M

Route Designator

Routing

PATOM 1M

BUDEB[T158.2;A3000] - LAGMA - VUVAN[R] - BONE - MUSAN - ENELI - TUKEN - ALKAG[A3000] - DEBIL[A4000] - LABNO[A5000] - PATOM[A6000-]

Changes: Editorial

DOHA/Hamad Intl.(OTHH)
RNP RWY 16L
PATOM 1M

STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO

TABULAR DESCRIPTION

RNP SID PATOM 1M											
Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA/ TCH	Navigation Specification
1	CF	BUDEB	-	156 (158.2)	2.3	-		@3000			RNP 1.0
2	TF	LAGMA	-	156 (158.2)	2.3	4.2		-			RNP 1.0
3	TF	VUVAN	-	169 (171.2)	2.3	7.9	R	-			RNP 1.0
4	TF	BONEL	-	266 (268.3)	2.3	10.2		-			RNP 1.0
5	TF	MUSAN	-	351 (353.5)	2.3	19.9		-			RNP 1.0
6	TF	ENELI	-	339 (341.4)	2.3	17.1		-			RNP 1.0
7	TF	TUKEN	-	037 (039.5)	2.3	8.9		-			RNP 1.0
8	TF	ALKAG	-	037 (039.6)	2.3	5		@3000			RNP 1.0
9	TF	DEBIL	-	037 (039.6)	2.3	3.7		@4000			RNP 1.0
10	TF	LABNO	-	335 (337.1)	2.3	7.9		@5000			RNP 1.0
11	TF	PATOM	-	296 (298.2)	2.3	15.8		-6000			RNP 1.0

WAYPOINT LIST

RNP SID PATOM 1M	
Waypoint Identifier	Coordinates
ALKAG	254042.91N 0513448.24E
BONEL	245356.87N 0513333.25E
BUDEB	250600.67N 0514142.21E
DEBIL	254336.08N 0513726.39E
ENELI	252959.45N 0512502.14E
LABNO	255053.49N 0513401.89E
LAGMA	250204.62N 0514325.78E
MUSAN	251345.36N 0513104.37E
PATOM	255821.41N 0511836.36E
TUKEN	253650.90N 0513116.64E
VUVAN	245415.69N 0514445.27E