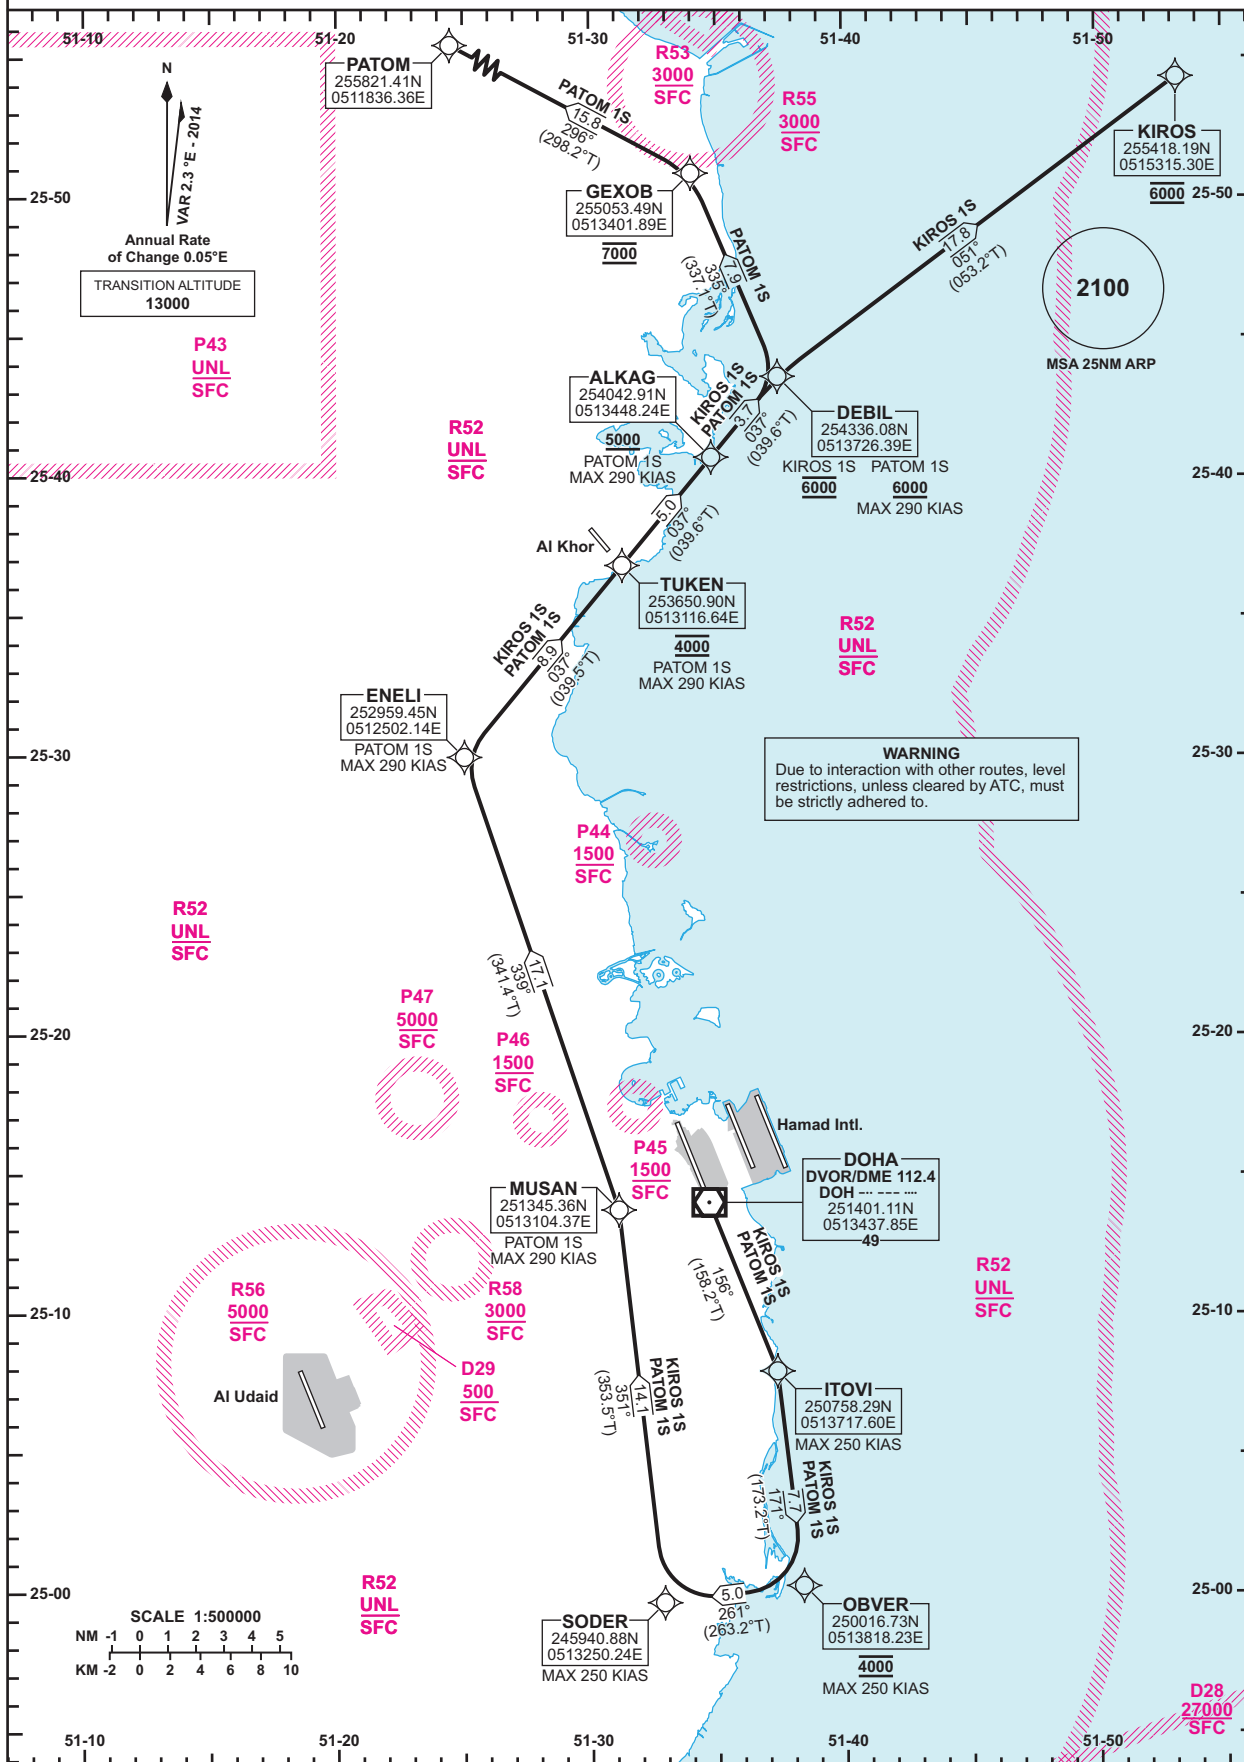


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEETDOHA RADAR 121.10
DOHA APP 119.725 / 120.60
TWR 118.90 / 118.65DOHA/Doha Intl. (OTBD)
RNAV RWY 15
KIROS 1S /PATOM 1S

Route Designator	Routing
KIROS 1S	ITOV[K250-] - OBVER[R;A4000;K250-] - SODER[R;K250-] - MUSAN - ENELI - TUKEN[A4000] - ALKAG[A5000+] - DEBIL[A6000] - KIROS[A6000]
PATOM 1S	ITOV[K250-] - OBVER[R;A4000;K250-] - SODER[R;K250-] - MUSAN[K290-] - ENELI[K290-] - TUKEN[A4000;K290-] - ALKAG[A5000+;K290-] - DEBIL[A6000+;K290-] - GEXOB[A7000] - PATOM

GENERAL INFORMATION

1. Close-in obstacles exist for Rwy 15 departures.