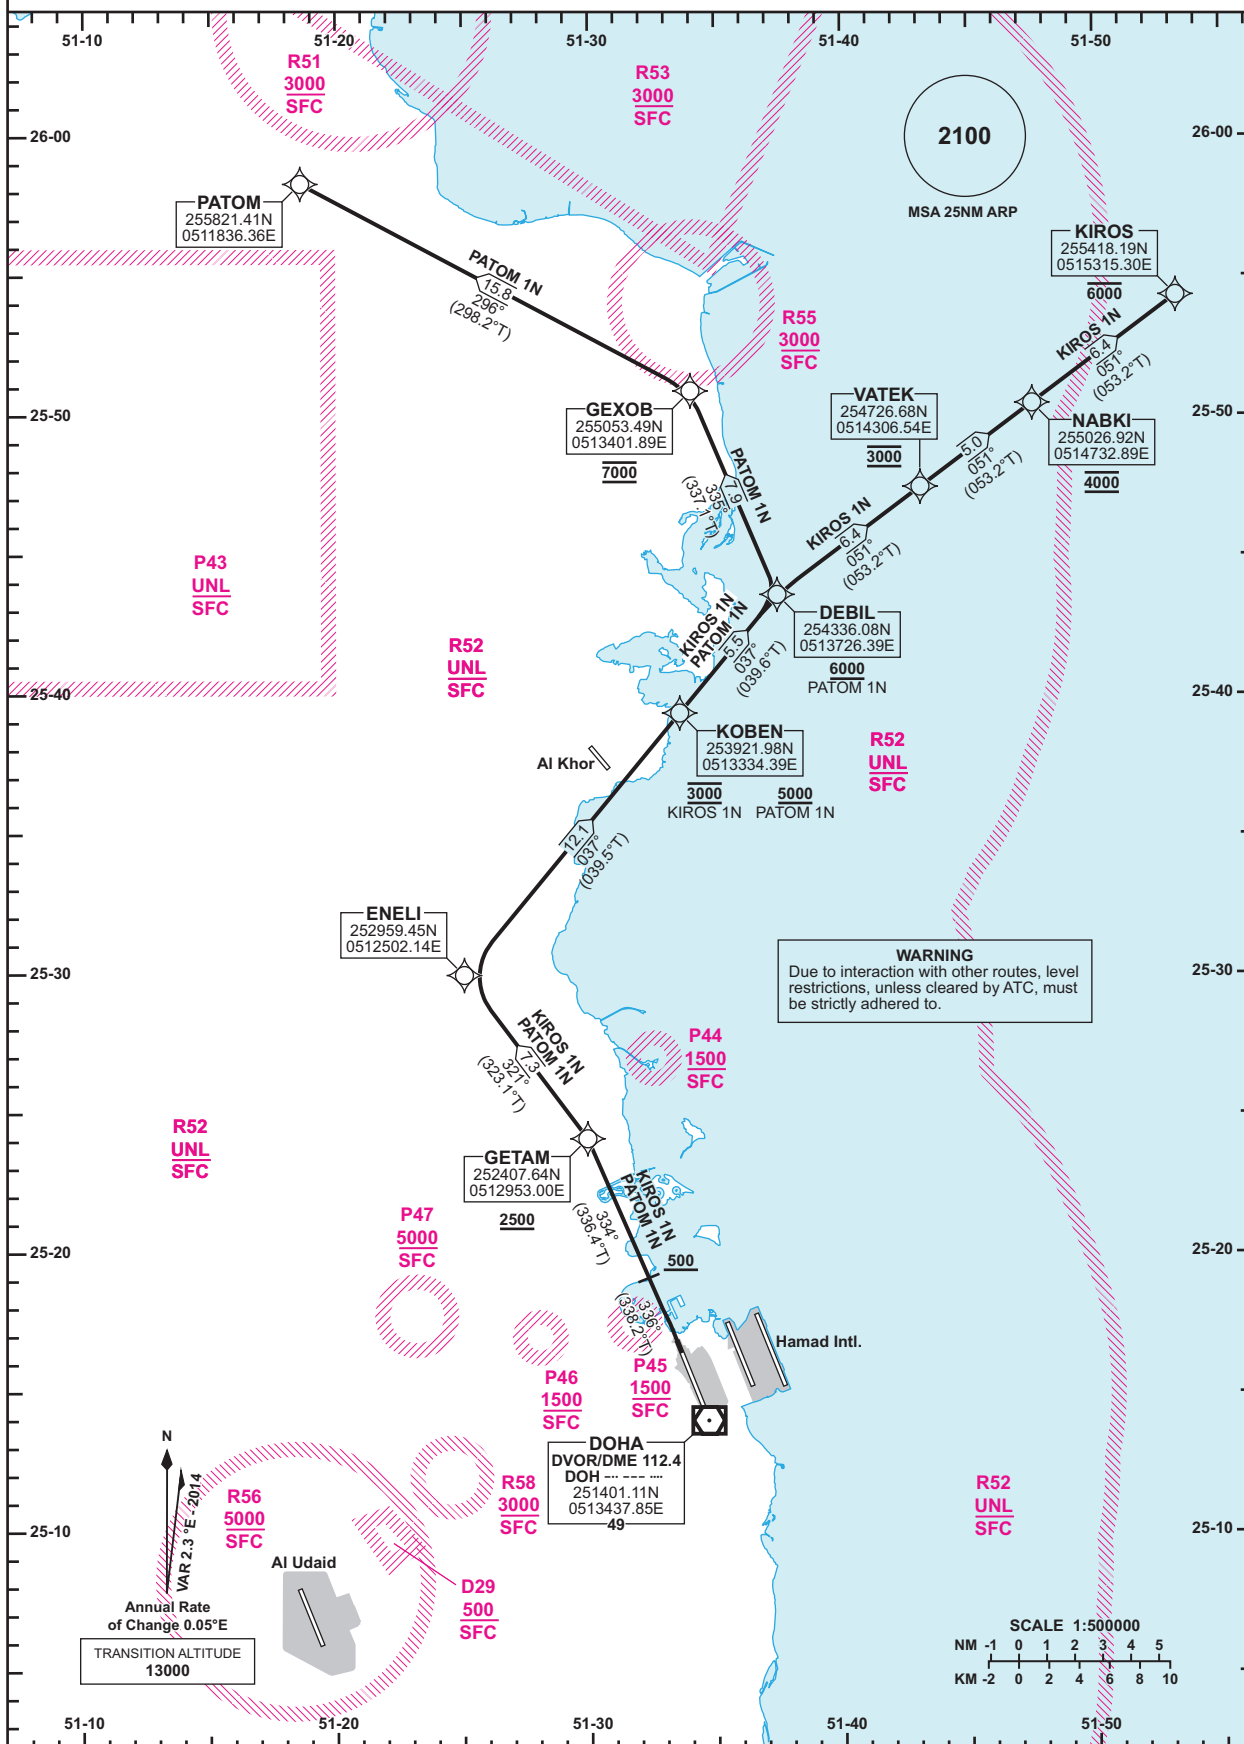


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEETDOHA RADAR 121.10
DOHA APP 119.725 / 120.60
TWR 118.90 / 118.65DOHA/Doha Intl. (OTBD)
RNAV RWY 33
KIROS 1N /PATOM 1N

Route Designator	Routing
KIROS 1N	[T338.2; A500+] - GETAM[T336.4; A2500+] - ENELI - KOBEN[A3000] - DEBIL - VATEK[A3000] - NABKI[A4000] - KIROS[A6000]
PATOM 1N	[T338.2; A500+] - GETAM[T336.4; A2500+] - ENELI - KOBEN[A5000+] - DEBIL[A6000+] - GEXOB[A7000] - PATOM

GENERAL INFORMATION

1. Close-in obstacles exist for Rwy 33 departures.
2. 9.2% CG required to 640.