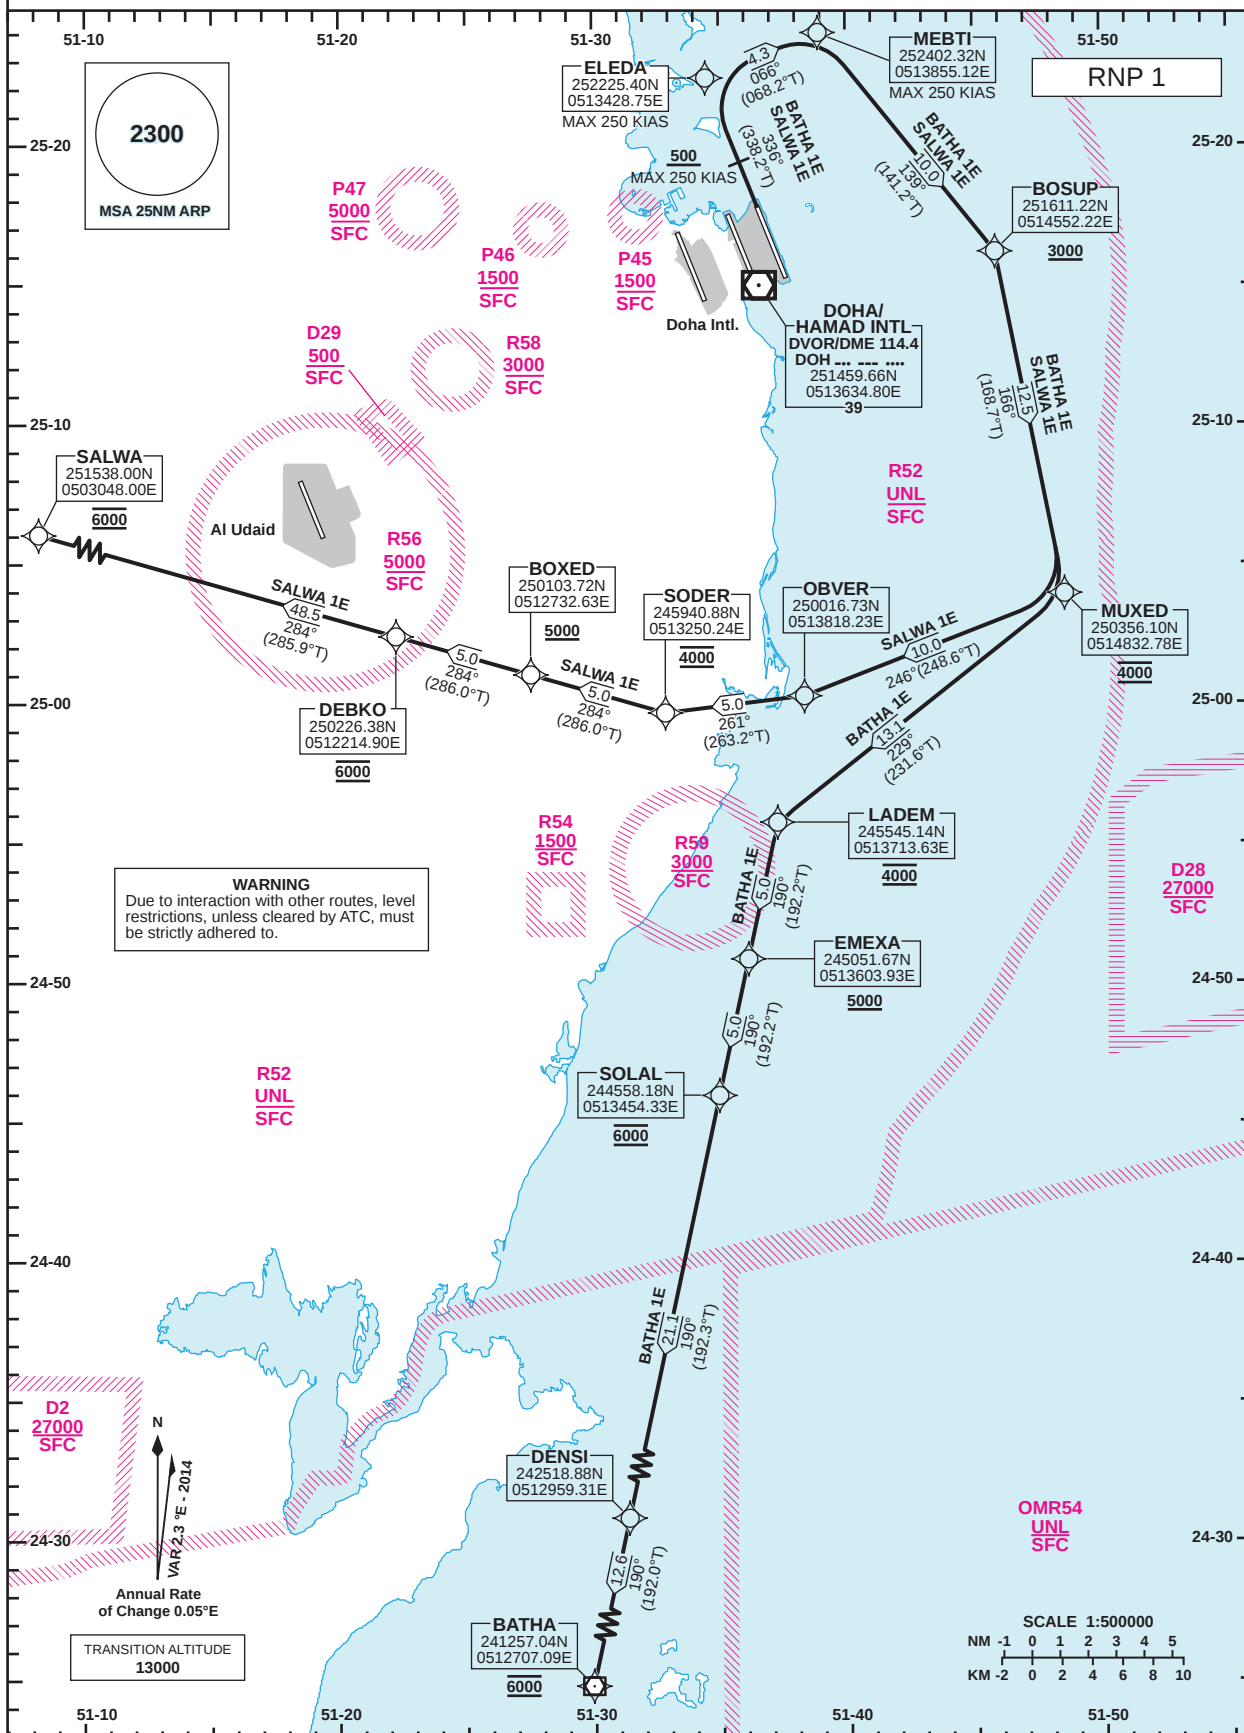


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEET

DOHA RADAR	121.10
DOHA APP	119.725 / 120.60
TWR (EAST)	118.525 / 118.225
TWR (WEST)	118.025 / 118.225

DOHA/Hamad Intl. (OTHH)
RNP RWY 34R
BATHA 1E /SALWA 1E

Route Designator	Routeing
BATHA 1E	[T338.2; A500+; K250-] - ELED[R; T338.2; K250-] - MEBTI[K250-] - BOSUP[A3000+] - MUXED[A4000] - LADEM[A4000] - EMEXA[A5000+] - SOLAL[A6000] - DENSI - BATHA[A6000]
SALWA 1E	[T338.2; A500+; K250-] - ELED[R; T338.2; K250-] - MEBTI[K250-] - BOSUP[A3000+] - MUXED[A4000] - OBVER - SODER[A4000] - BOXED[A5000+] - DEBKO[A6000] - SALWA[A6000]

GENERAL INFORMATION

1. Close-in obstacles exist for Rwy 34R departures.

Standard Instrument Departure Coding Table

HAMAD INTERNATIONAL RNP Standard Instrument Departure BATHA 1E, SALWA 1E

OTHH RNP SID BATHA 1E

Serial Num	PT	WPT	Flyover	Course(T)	Magnetic Variation	Dist(NM)	Turn Direction	Altitude Description	Speed Limit	THR Elev TCH (ft)	VPA (°)	Arc Center Wpt Ident/radius (NM)	Navigational Performance
1	CA	-	-	336 (338.2)	2.3	-		+500	-250				RNP1.0
2	CF	ELEDA	-	336 (338.2)	2.3	-	R	-	-250				RNP1.0
3	TF	MEBTI	-	066 (068.2)	2.3	4.3		-	-250				RNP1.0
4	TF	BOSUP	-	139 (141.2)	2.3	10.0		+3000	-				RNP1.0
5	TF	MUXED	-	166 (168.7)	2.3	12.5		@4000	-				RNP1.0
6	TF	LADEM	-	229 (231.6)	2.3	13.1		@4000	-				RNP1.0
7	TF	EMEXA	-	190 (192.2)	2.3	5.0		+5000	-				RNP1.0
8	TF	SOLAL	-	190 (192.2)	2.3	5.0		@6000	-				RNP1.0
9	TF	DENSI	-	190 (192.3)	2.3	21.1		-	-				RNP1.0
10	TF	BATHA	-	190 (192.0)	2.3	12.6		@6000	-				RNP1.0

OTHH RNP SID SALWA 1E

Serial Num	PT	WPT	Flyover	Course(T)	Magnetic Variation	Dist(NM)	Turn Direction	Altitude Description	Speed Limit	THR Elev TCH (ft)	VPA (°)	Arc Center Wpt Ident/radius (NM)	Navigational Performance
1	CA	-	-	336 (338.2)	2.3	-		+500	-250				RNP1.0
2	CF	ELEDA	-	336 (338.2)	2.3	-	R	-	-250				RNP1.0
3	TF	MEBTI	-	066 (068.2)	2.3	4.3		-	-250				RNP1.0
4	TF	BOSUP	-	139 (141.2)	2.3	10.0		+3000	-				RNP1.0
5	TF	MUXED	-	166 (168.7)	2.3	12.5		@4000	-				RNP1.0
6	TF	OBVER	-	246 (248.6)	2.3	10.0		-	-				RNP1.0
7	TF	SODER	-	261 (263.2)	2.3	5.0		@4000	-				RNP1.0
8	TF	BOXED	-	284 (286.0)	2.3	5.0		+5000	-				RNP1.0
9	TF	DEBKO	-	284 (286.0)	2.3	5.0		@6000	-				RNP1.0
10	TF	SALWA	-	284 (285.9)	2.3	48.5		@6000	-				RNP1.0