


STANDARD DEPARTURE CHART - INSTRUMENT (SID) - ICAO

DIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEET

DOHA RADAR	121.10
DOHA APP	119.725 / 120.60
TWR (EAST)	118.525 / 118.225
TWR (WEST)	118.025 / 118.225

DOHA/Hamad Intl. (OTHH) RNP RWY 16R SALWA 1C

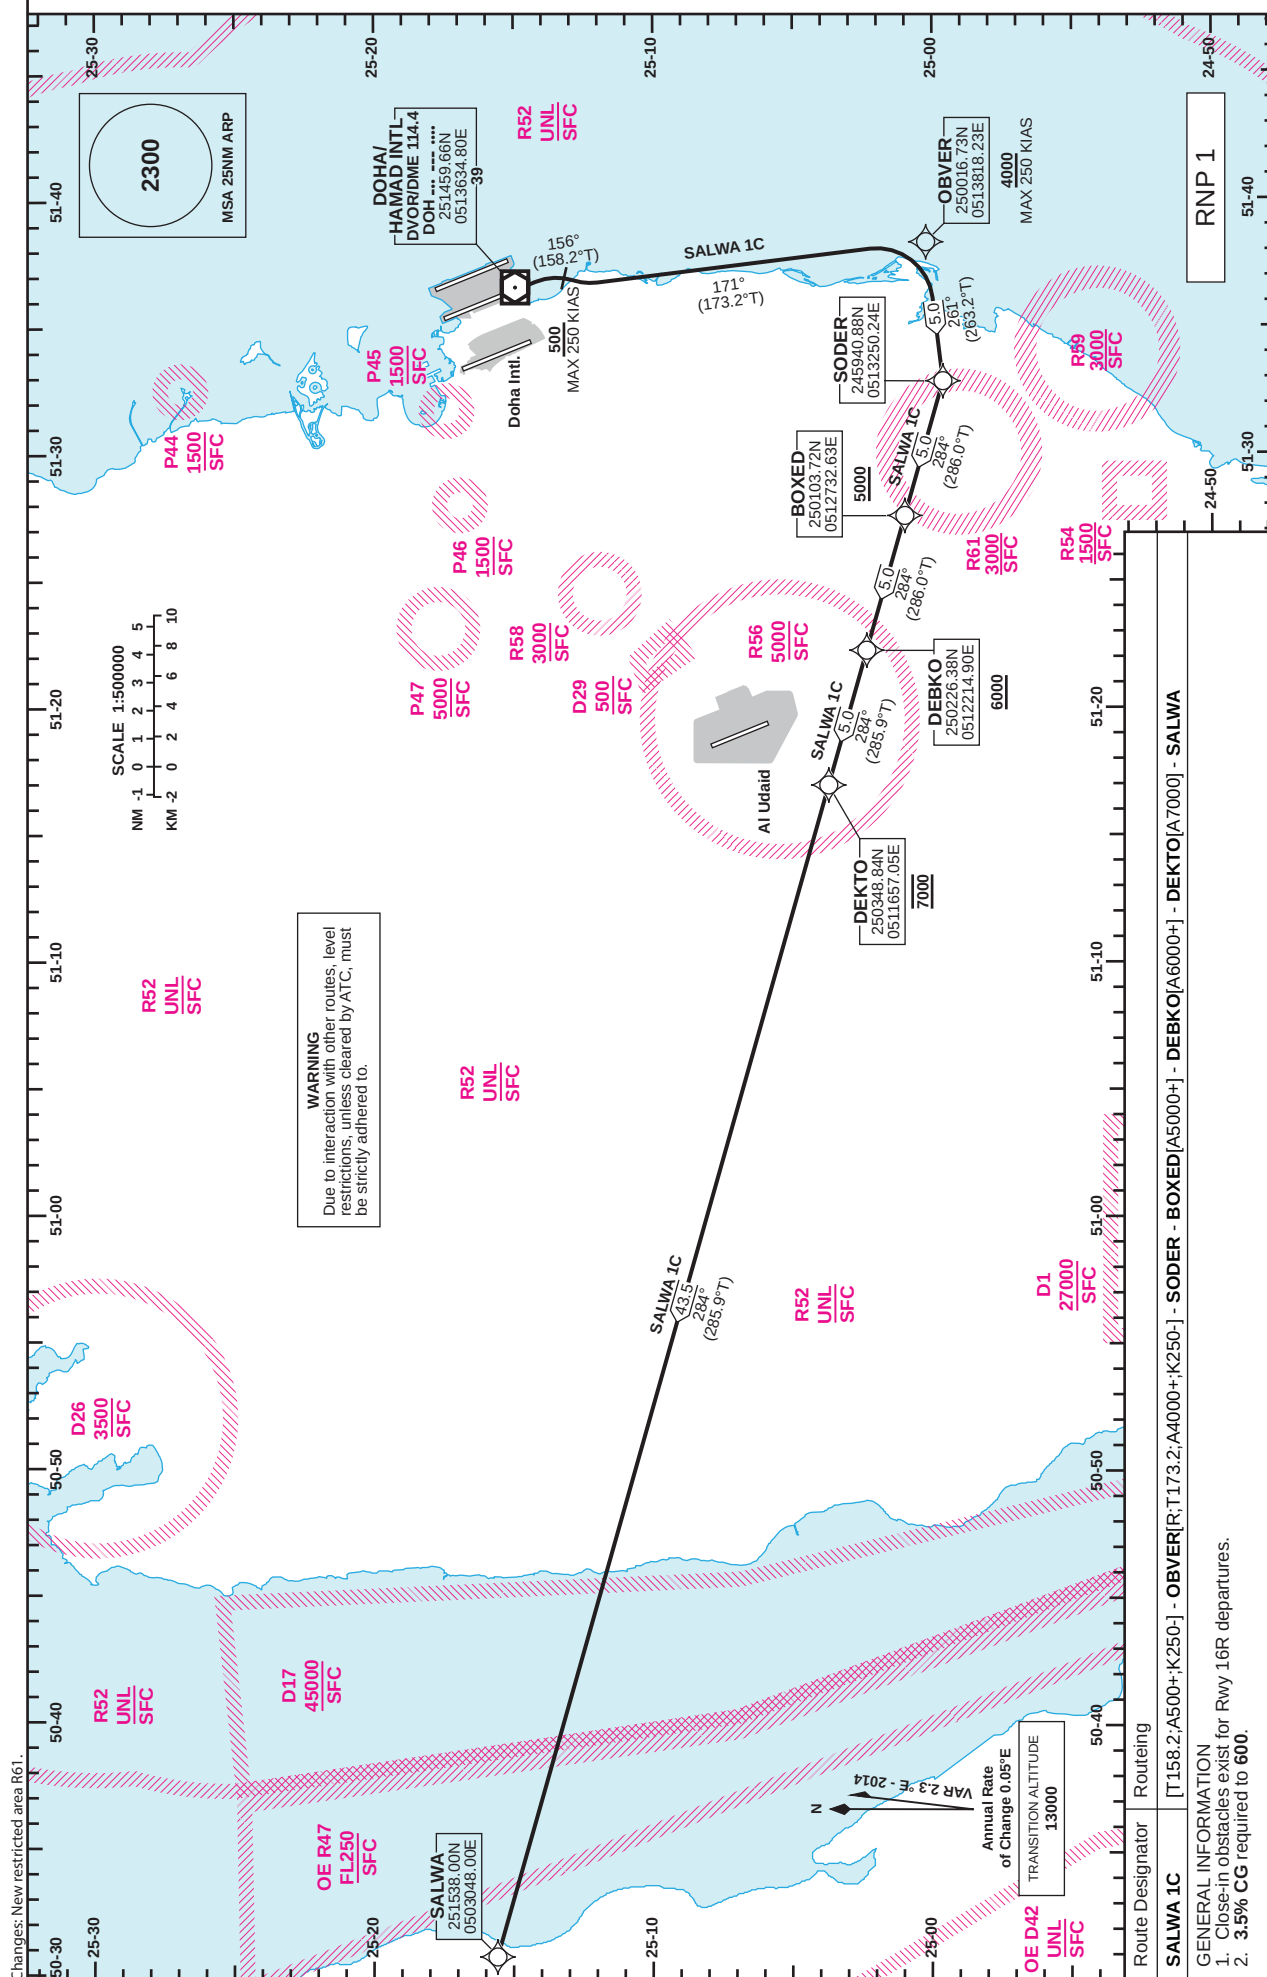

STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO

DOHA/Hamad Intl.(OTHH)
RNP RWY 16R
SALWA 1C

TABULAR DESCRIPTION

RNP SID SALWA 1C											
Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/TCH(ft)	Navigation Specification
1	CA		-	156 (158.2)	2.3	-		+500	-250		RNP 1
2	CF	OBVER	-	171 (173.2)	2.3	-	R	+4000	-250		RNP 1
3	TF	SODER	-	261 (263.2)	2.3	5.0					RNP 1
4	TF	BOXED	-	284 (286.0)	2.3	5.0		+5000			RNP 1
5	TF	DEBKO	-	284 (286.0)	2.3	5.0		+6000			RNP 1
6	TF	DEKTO	-	284 (285.9)	2.3	5.0		@7000			RNP 1
7	TF	SALWA	-	284 (285.9)	2.3	43.5					RNP 1

WAYPOINT LIST

RNP SID SALWA 1C	
Waypoint Identifier	Coordinates
OBVER	250016.73N 0513818.23E
SODER	245940.88N 0513250.24E
BOXED	250103.72N 0512732.63E
DEBKO	250226.38N 0512214.90E
DEKTO	250348.84N 0511657.05E
SALWA	251538.00N 0503048.00E